

Industrial Camera Cover CH50

Datasheet



- Body made of anodized aluminum,
- ensures mechanical protection and cooling of the camera,
- front part is adapted for easy lens adjustment,
- contains cable gland for 1 or 2 cables,
- low weight, variable mounting with **included mounting kit**,
- removable front and rear part,
- different enclosure length on request.




Material properties

Body	Anodised Aluminium
Seal	EPDM
Glass	N-BK7, anti-reflection coating MgF2 (standard 390~700 nm)
Cable gland	Nickel-plated brass, NBR
Mounting kit	Anodised Aluminium

Dimensions, environment

External dimensions	Cross section 56 x 56 mm, length 173 ± 2,5 mm incl. the cable gland
Internal dimensions	Ø 50 mm
Glass	Ø 35 mm
Protection class	IP 66
weight	600g including accessories

Dimensions

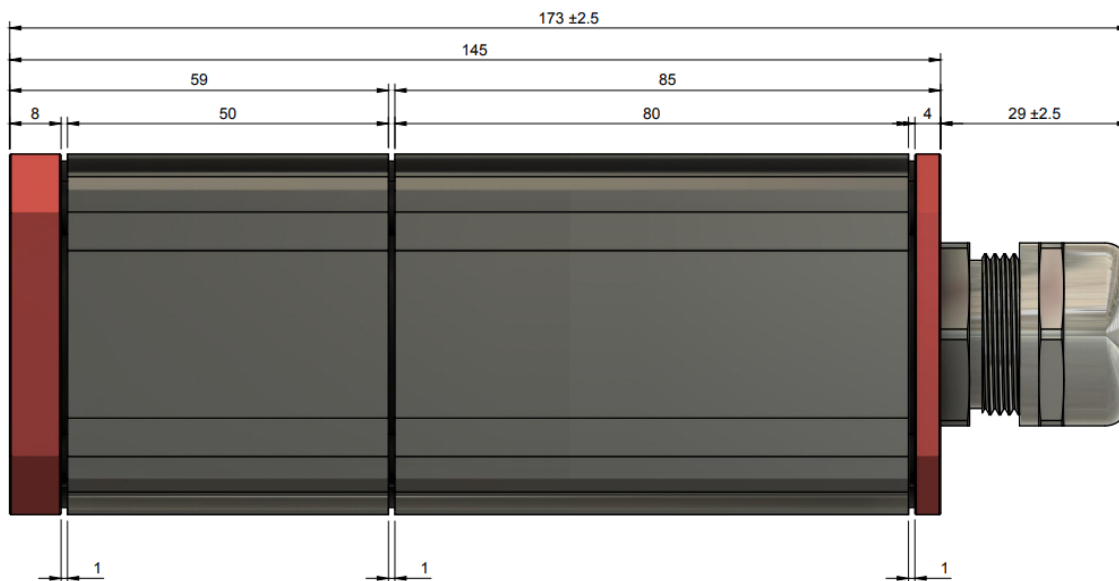

Accessories

- 1) Cable gland with insert for 1 or 2 cables \varnothing 4-6mm. Cutting capability for inserting a cable with connectors.
- 2) Spacer to lock the camera.
- 3) 4x screw M2x6 DIN 912 for fixing the camera to the fixed part of the spacer.
- 4) Mounting kit for camera enclosure.

Mounting kit

Easy mounting of the enclosure. Prepared mounting holes in the base for screws up to M5 size.

